


CANOPY - "Rectangular Frame Measurement Guide"

Side Door Access Panel

RIGHT SIDE ACCESS

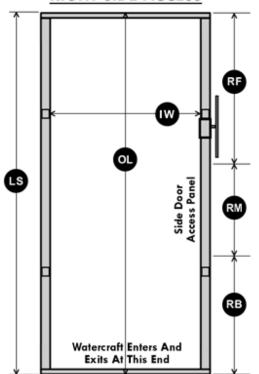

MEASUREMENTS

Use one of the three options below to record the correct length sizes depending on where you would like the side door access panel(s).

ABBREVIATIONS

OL = Overall Length

IW = Inside Width

LF = Left Front

LM = Left Middle

LB = Left Back

LS = Left Solid

RF = Right Front

RM = Right Middle RB = Right Back

RS = Right Solid

REQUIRED INFO

Lift Manufacturer:

Lift Model #: (If Available)

Color: _____

OL: _____

IW: _____

** Choose One Below ** LEFT SIDE ACCESS

LF: _____

LM: _____

LB: _____

RS:

RIGHT SIDE ACCESS

LS: _____

RF: _____

DR.

DOUBLE SIDE ACCESS

LF:

LM: _____

LB: _____

--

RF: _____

KM:


RB: _

DOUBLE SIDE ACCESS

Watercraft Enters And

Exits At This End

LB

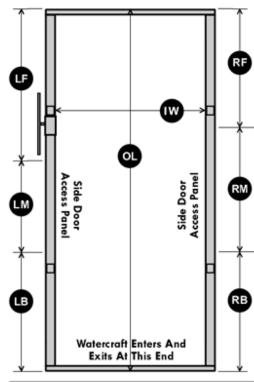

MEASURING NOTES:

- * To ensure correct grommet spacing the left and right side panels need to be measured in 6" increments. (Example: LF = 7', 7'6", 8', 8'6", 9', etc.)
- * You do NOT need to provide Front and Back end panel measurements. These are automatically determined based on the Inside Width (IW) you provided to us.
- * When calculating the panel length by the wheel it is best to measure beyond the winch/wheel assembly. See on diagrams.
- * Location of wheel assembly is shown on front post in the diagrams however it may also be located on the back post. This does not affect the performance or usability of the Canopy Skirts.
- * For additional measurement help please call us.

CONTACT INFORMATION

Pav	WIO	W۶	KΙ	E	n	terpris	es,	LLC.	
PO Bo	x 7	16	81		-	Clive	, IA	5032	

Phone: 1-866-420-4242 Fax: 1-866-420-4343 Email: sales@canopyskirts.com Copyright 2005 All rights reserved. Patented.

Address:			_
City:	State:	Zip:	
Phone:	Fax:		

Email Address: